



CE
DIN 15018 H1 B3

R	R _(Cmax)	C _{max}	25	30	34	40	44	50	55	60	m
60	33,1 m 17,5 m	4000 8000	4000 5365	4000 4350	3885 3775	3230 3095	2895 2750	2490 2345	2225 2075	2000 1850	kg
55	33,5 m 17,7 m	4000 8000	4000 5420	4000 4395	3930 3795	3270 3125	2930 2785	2520 2375	2250 2100		
50	33,2 m 17,5 m	4000 8000	4000 5375	4000 4355	3900 3765	3240 3100	2905 2760	2500 2350			
44	35,6 m 18,8 m	4000 8000	4000 5805	4000 4715	4000 4080	3515 3365	3150 3000				
40	36,0 m 18,9 m	4000 8000	4000 5860	4000 4760	4000 4120	3550 3400					
34	34,0 m 19,2 m	4000 8000	4000 5970	4000 4850	4000 4200						
30	30,0 m 19,2 m	4000 8000	4000 5970	4000 4850							

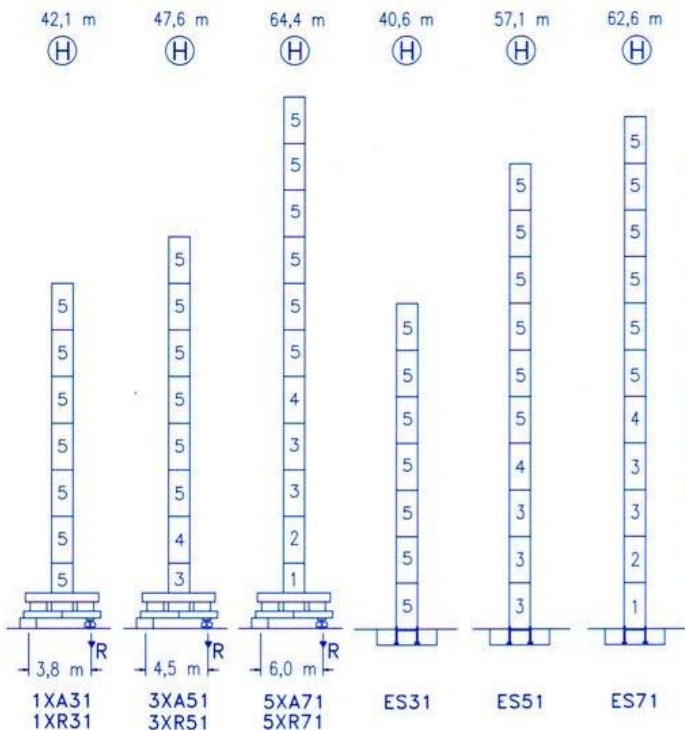

N	Ref.	h
1	S15	5,5 m
2	TS15	5,5 m
3	S14	5,5 m
4	TS14	5,5 m
5	S13	5,5 m
9	CLS13.1	3,1 m

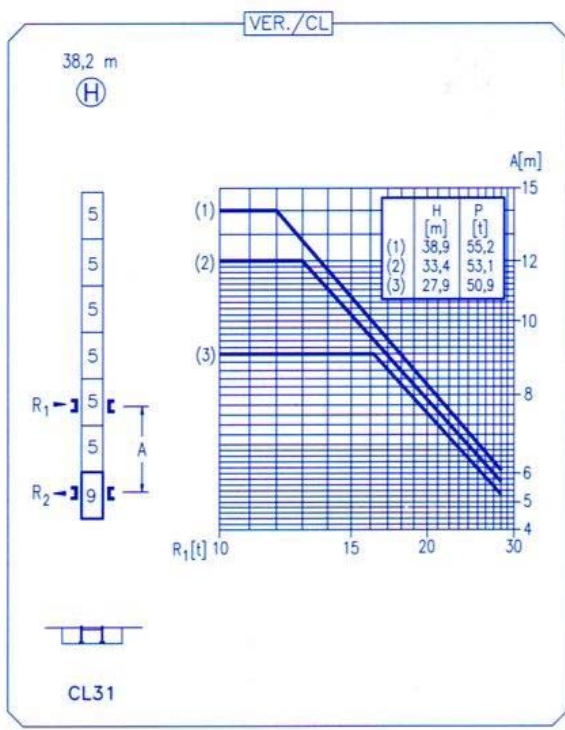

R. máx.	En servicio	1XR31 74,0 t
	In operation	3XR51 71,9 t
	En service	5XR71 82,4 t
	In Betrieb	

R. máx.	Fuera de servicio	1XR31 81,7 t
	Out of service	3XR51 89,4 t
	Hors service	5XR71 125,4 t
	Ausser Betrieb	

CFU-4.0

4 kW

0 ⇄ 66 m/min

GR-7.5

2 x 75 Nm

0 ⇄ 0,7 rpm



TS2-5.5	TRA-7.5
2 x 55 Nm	2 x 75 Nm
0 ⇄ 20 m/min	
1XR31 3XR51	5XR71

TRA-7.5VC

2 x 75 Nm

0 ⇄ 20 m/min

5XR71

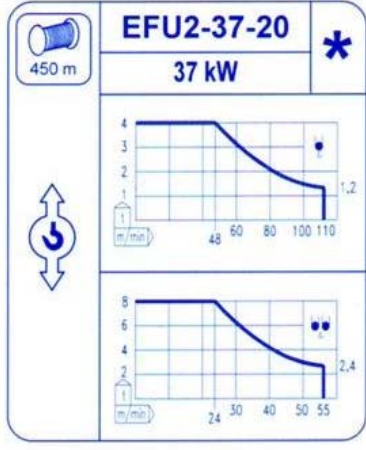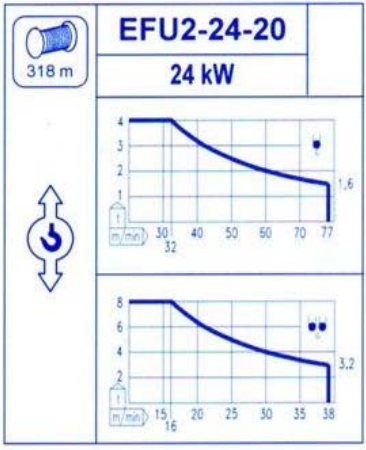

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Optional	*
Optional	
En option	
Kaufoption	



GRUAS Y MAQUINARIA, S.A. (GRUYMSA)
 C/SEVERO OCHOA, 10 POLIGONO INDUSTRIAL
 28860 – PARACUELLOS DE JARAMA (MADRID)
 TLF.: 91 658 09 15 – FAX: 91 658 05 97
 www.gruymsa.com