




COMANSA

LINDEN 2100


21 LC 290


12 t

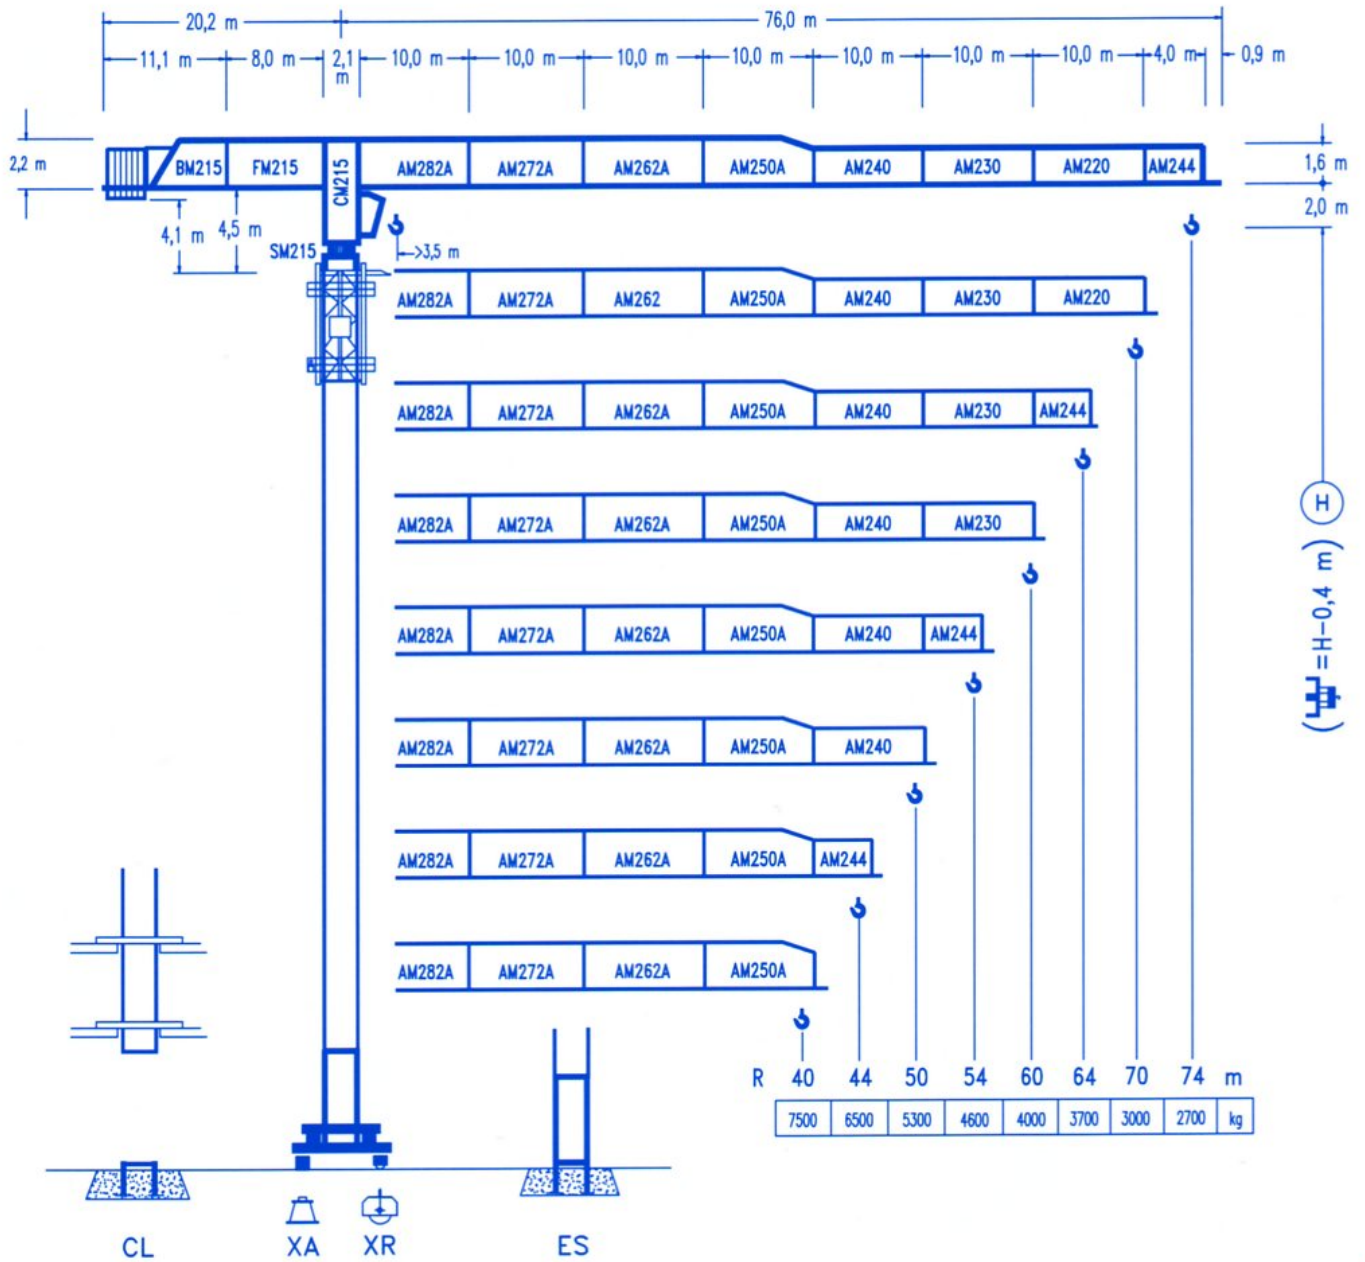


CE
DIN 15018 H1 B3

R	H				H								
	20,2	25	30	35,9	37,3	40	44	50	54	60	64	70	74
	12000	9345	7500	6000	6000	5545	4980	4300	3930	3475	3220	2890	2700
74													
70	20,7	25	30	36,8	38,5	40	44	50	54	60	64	70	m
	12000	9610	7720	6000	6000	5745	5155	4455	4075	3605	3340	3000	kg
64	22,3	25	30	34	39,6	41,9	44	50	54	60	64	m	
	12000	10470	8430	7245	6000	6000	5685	4920	4505	3990	3700	kg	
60	22,1	25	30	34	39,4	42,0	44	50	54	60	m		
	12000	10390	8370	7195	6000	6000	5695	4930	4515	4000	kg		
54	22,3	25	30	34	39,8	42,7	44	50	54	m			
	12000	10500	8460	7275	6000	6000	5800	5020	4600	kg			
50	23,2	25	30	34	40	41,4	44,8	50	m				
	12000	11005	8880	7645	6265	6000	6000	5300	kg				
44		25,9	30	34	37	40	44	m					
	12000	10100	8715	7880	7170	6500	kg						
40		26,4	30	34	37	40	m						
	12000	10345	8930	8075	7500	kg							



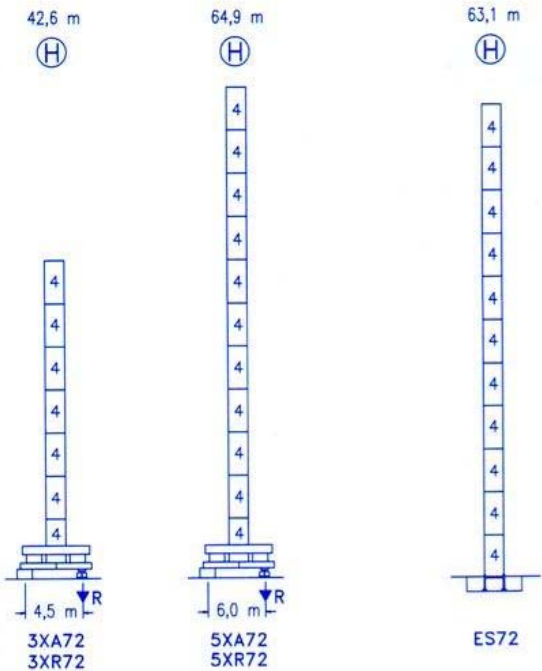

N	Ref.	Ø (m)	h (m)
3	TD23A	2,0	5,5
4	S25	2,0	5,5
11	CLD23A	2,0	3,1

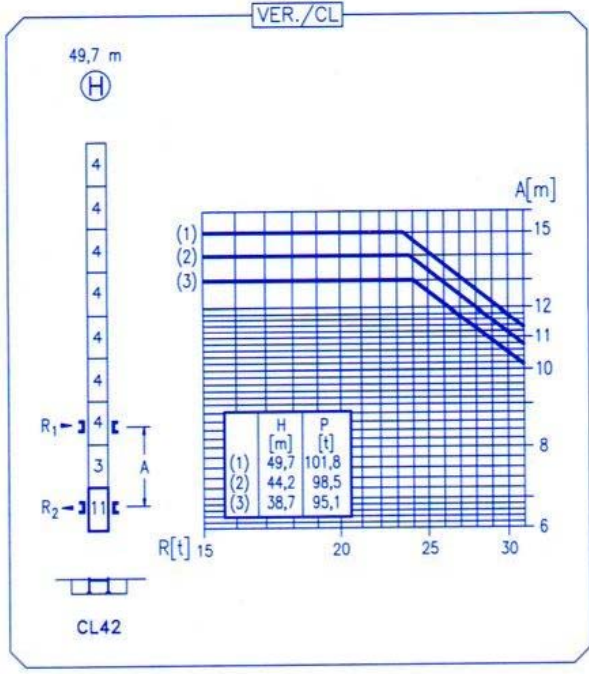

R. máx.	En servicio In operation En service In Betrieb	3XR72 105,9 t
		5XR72 113,6 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	3XR72 90,3 t
		5XR72 150,3 t

CFU-7.5
7,5 kW
0 ⇄ 94 m/min

GR-12
3 x 120 Nm
0 ⇄ 0,7 rpm

TRA-7.5
2 x 75 Nm
0 ⇄ 20 m/min

TRA-7.5VC
2 x 75 Nm
0 ⇄ 20 m/min
5XR72

EFU2-37-30
385 m
37 kW
0 ⇄ 94 m/min

EFU4-45-30
545 m
45 kW
0 ⇄ 94 m/min

EFU4-65-30
790 m
65 kW
0 ⇄ 94 m/min

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



GRUAS Y MAQUINARIA, S.A. (GRUYMSA)
C/SEVERO OCHOA, 10 POLIGONO INDUSTRIAL
28860 - PARACUELLOS DE JARAMA (MADRID)
TLF.: 91 658 09 15 - FAX: 91 658 05 97
www.gruymsa.com

REGUINSA
REPUESTOS PARA GRUAS E IND., S.A.
Eugenio Salazar, 32 local 5
28002 MADRID
Teléfono 91 415 14 78