




COMANSA


LINDEN 2100


21 LC 210

12 t

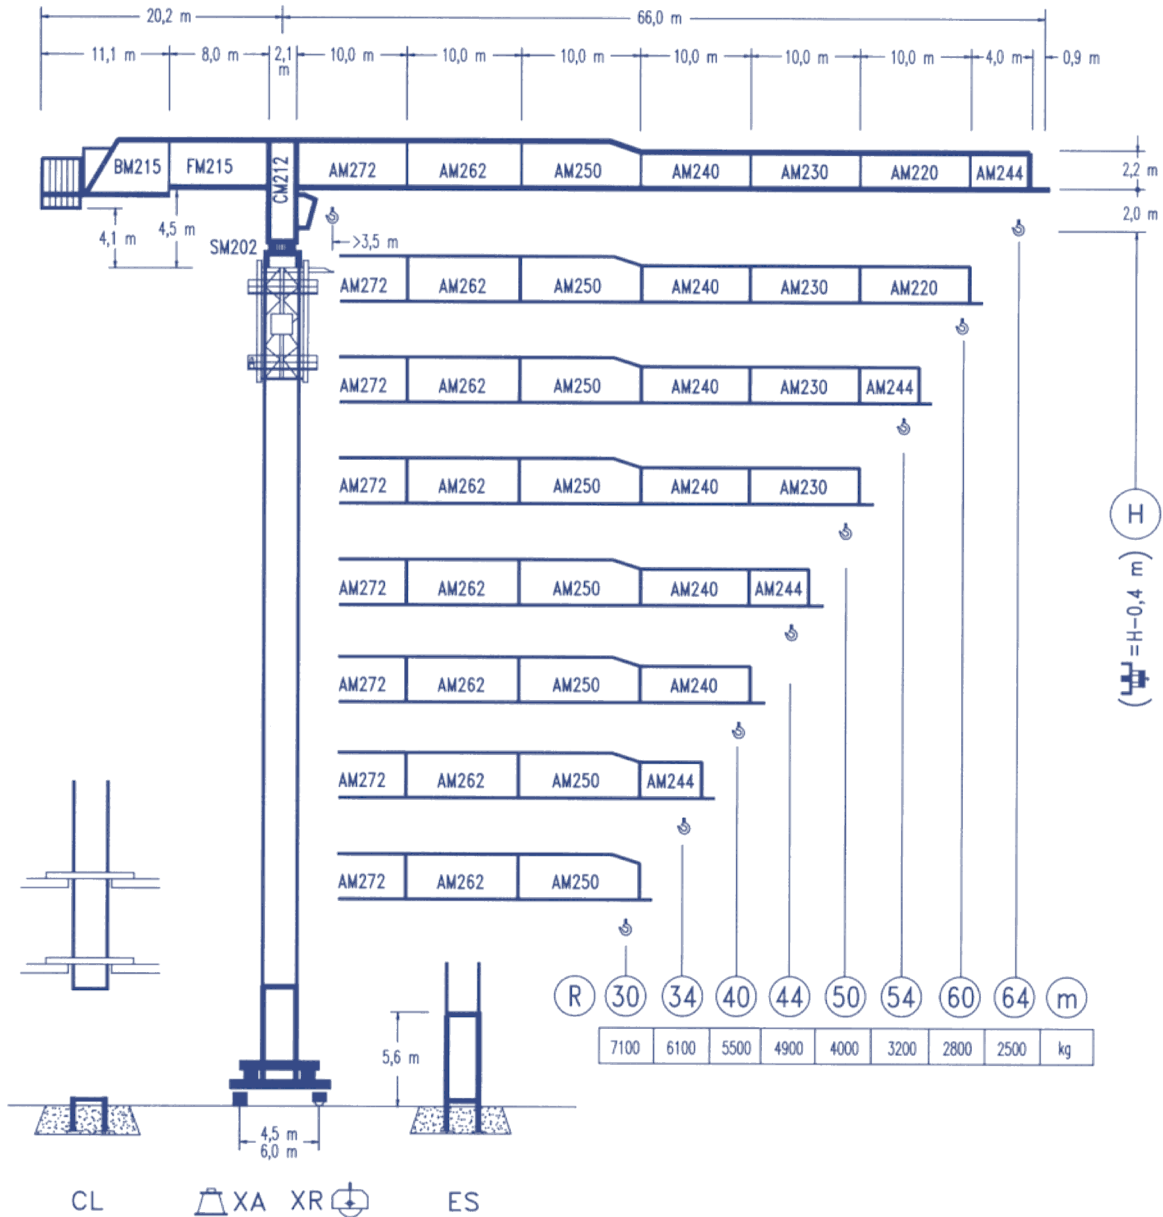


R	CL				ES											
64	15,9	20	25	28,4	30,6	34	37	40	44	47	50	54	57	60	64	m
	12000	9185	7030	6000	6000	5315	4820	4405	3940	3645	3385	3085	2885	2710	2500	kg
60	16,3	20	25	29,1	31,5	34	37	40	44	47	50	54	57	60	60	m
	12000	9445	7235	6000	6000	5475	4970	4540	4065	3760	3495	3185	2980	2800	2800	kg
54	16,3	20	25	29,2	31,5	34	37	40	44	47	50	54	57	60	60	m
	12000	9460	7245	6000	6000	5500	4990	4560	4080	3775	3510	3200	2980	2800	2800	kg
50	18,1	20	25	30	32,4	35,1	37	40	44	47	50	54	57	60	60	m
	12000	10685	8215	6600	6000	6000	5660	5185	4640	4300	4000	3700	3400	3100	2800	kg
44	18,9	20	25	30	33,9	36,8	37	40	44	47	50	54	57	60	60	m
	12000	11225	8645	6955	6000	6000	5970	5465	4900	4500	4200	3900	3600	3300	3000	kg
40	18,9	20	25	30	34	37	40	44	47	50	54	57	60	60	60	m
	12000	11270	8680	6985	6000	6000	5500	5000	4500	4200	3900	3600	3300	3000	2700	kg
34	18,8	20	25	30	34	37	40	44	47	50	54	57	60	60	60	m
	12000	11200	8625	6940	6100	6000	5500	5000	4500	4200	3900	3600	3300	3000	2700	kg
30	18,8	20	25	30	34	37	40	44	47	50	54	57	60	60	60	m
	12000	11165	8595	7100	6100	6000	5500	5000	4500	4200	3900	3600	3300	3000	2700	kg



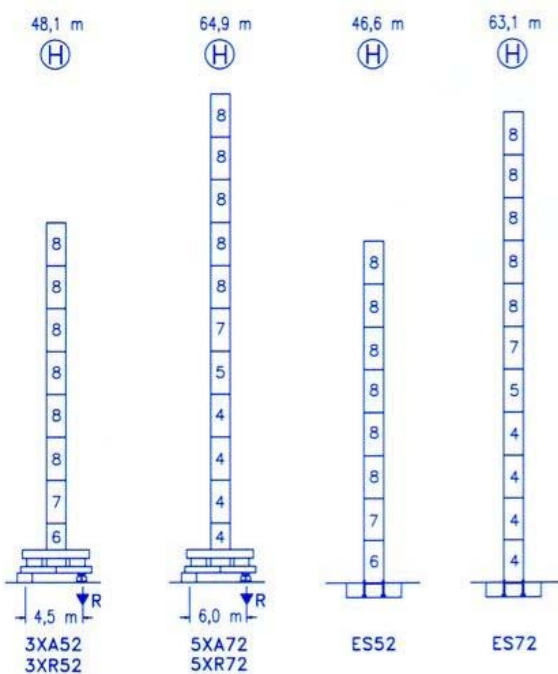

N	Ref.	h (m)
4	S25	2,0
5	TS25	2,0
6	S24	2,0
7	TS24	2,0
8	S23	2,0
10	S15	1,6
12	CLS15	1,6

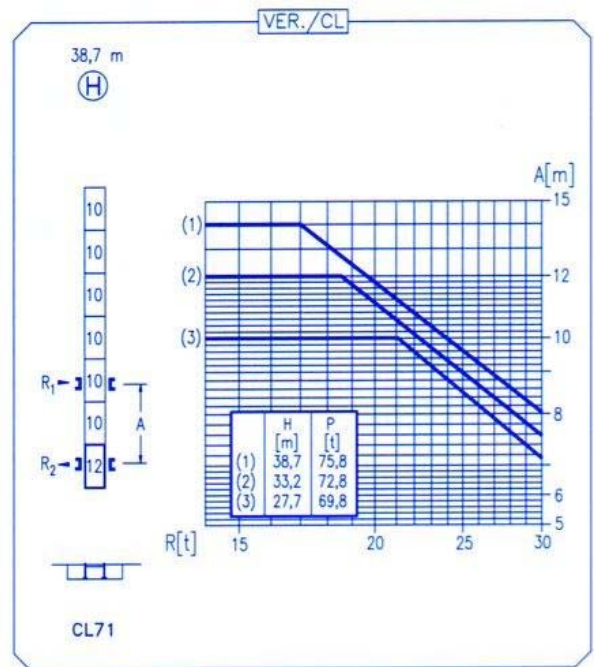

R. máx.	En servicio In operation En service In Betrieb	3XR52 90,1 t
		5XR72 95,7 t




R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	3XR52 94,4 t
		5XR72 134,0 t

CFU-7.5
7,5 kW
0 ↻ 94 m/min

GR-12
2 x 120 Nm
0 ↻ 0,7 rpm

TRA-7.5
2 x 75 Nm
0 ↻ 20 m/min

TRA-7.5VC
2 x 75 Nm
0 ↻ 20 m/min
5XR72

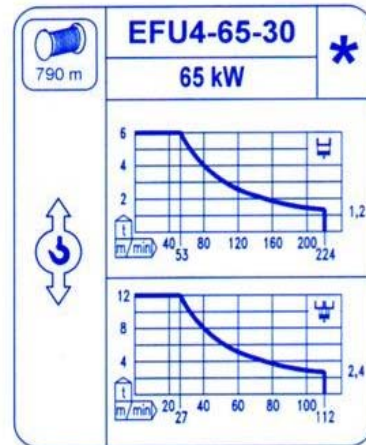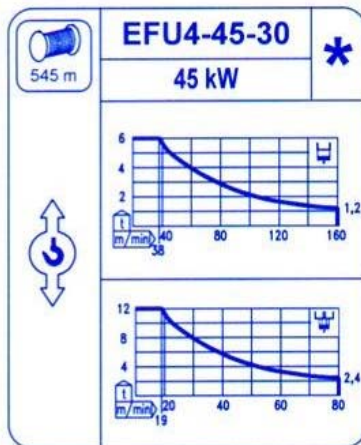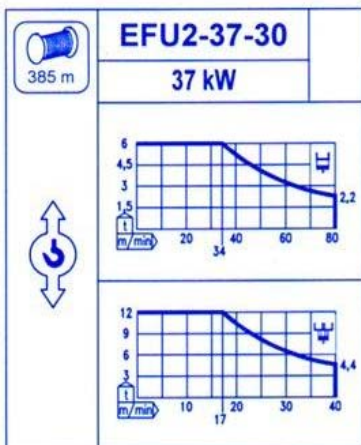

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



GRUAS Y MAQUINARIA, S.A. (GRUYMSA)
C/SEVERO OCHOA, 10 POLIGONO INDUSTRIAL
28860 - PARACUELLOS DE JARAMA (MADRID)
TLF.: 91 658 09 15 - FAX: 91 658 05 97
www.gruymsa.com